



External Banners - Installation Sequence


The banner is supplied rolled-up with a matched quantity of cable ties for easy installation . Securing all banner eyelets using the cable ties provided will ensure the best longevity. Position all banners considerably to avoid causing a restriction of view; eg roadside junctions/driver visibility/fire exits.

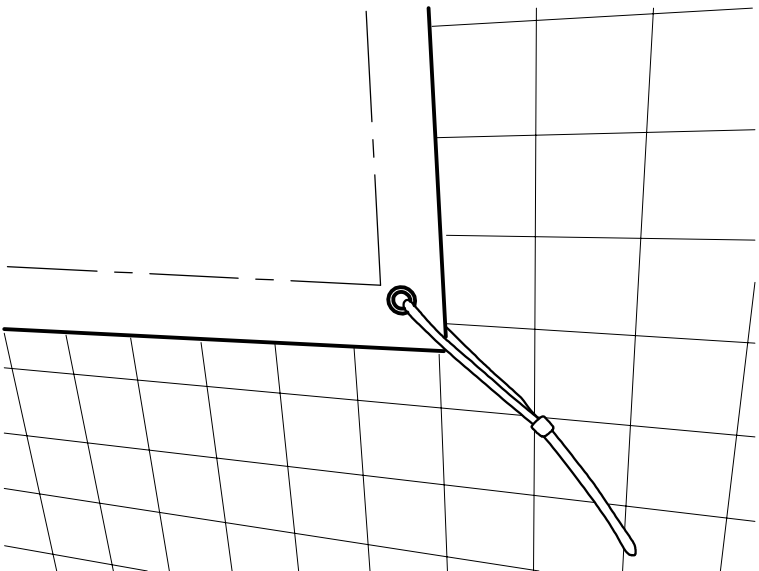

1. Keeping the banner in a roll, start at a top corner and secure the first eyelet with a cable tie.

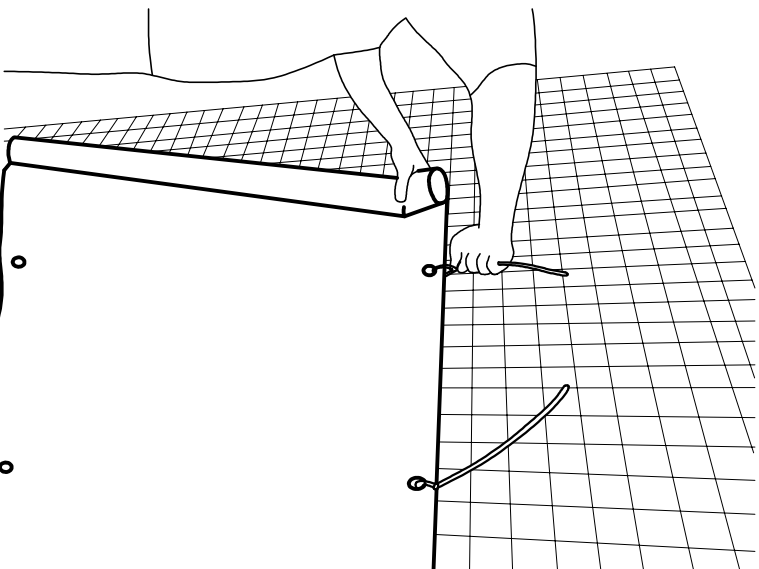

2. Progressively unroll the banner and secure the banner's top eyelets as they come into view. When fitting the last cable tie along the banner's top edge ensure that the banner is held in tension along its length

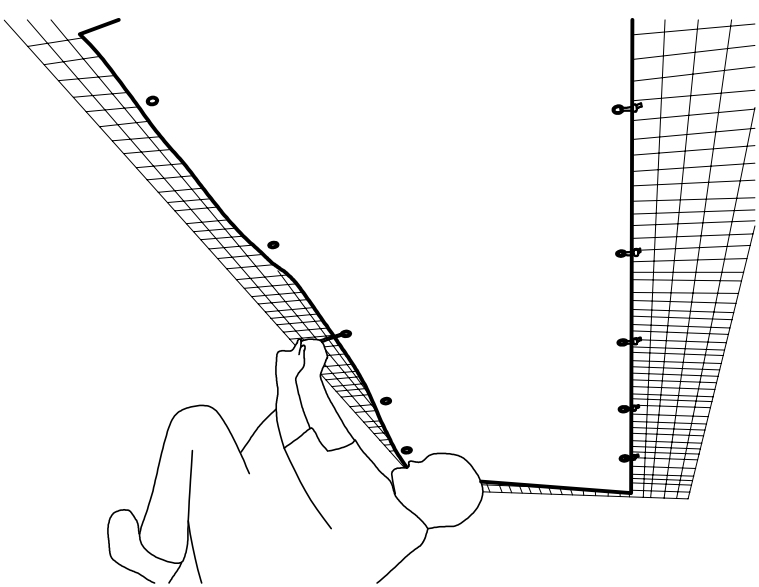

3. Attach the bottom edge of the banner starting from the centre outwards. When all cable ties are fitted check then that the banner is held taut and if necessary adjust the tension (any loose fitting can result in movement/flapping and an early deterioration of the banner's appearance). Trim-off cable tie tails for a tidy appearance.