



The Illumigo™ Up transforms portable lightbox displays with its innovative design. Featuring a pre-assembled scissor frame and integrated energy-efficient LED lights, it offers effortless setup in minutes. Use it as a standalone lightbox or connect multiple units with the integrated magnets and additional optional connectors to create a striking backwall display. The vibrant SEG graphics are easily interchangeable, making it simple to update your message. Plus, the optional document holder provides a convenient way to showcase supporting materials.

Product Specifications

- Free-standing double-sided white aluminium frame, 80 mm thick
- Prebuilt folding lightbox
- Pre-assembled twin twist-out feet. Pre-fitted vertical LED lights
- Internal reinforcement tube
- Power cable located under the frame
- Graphic attachment with SEG optional
- Nylon wheeled carry bag with foam insert for protection, carry handle and shoulder strap included

Features and Benefits

- Ultra-fast frame assembly: 30 seconds is all it takes!
The frame unfolds, and the 4 LED strips and feet are already pre-assembled
- Frames can be linked together in-line using magnets integrated into the profiles
- Integrated magnets
- Joinable structures: various possible configurations (optional connectors)
- Accessorised structures: optional A4 literature holder

Recommended Media

- Backlit fabric made with 3 x 12 mm SEG
- For double-sided printing, use 2 backlite graphics
For single-sided printing, use 1 backlite graphic + 1 black back (black out)


The printing templates provided are for guidance only. They take into account internal processes which may vary depending on your equipment, materials and finishes. If you are printing your own material, it is your responsibility to test the compatibility of your media with the product before use.



Folding frame

Pre-fitted Led lights

Wheeled carry bag

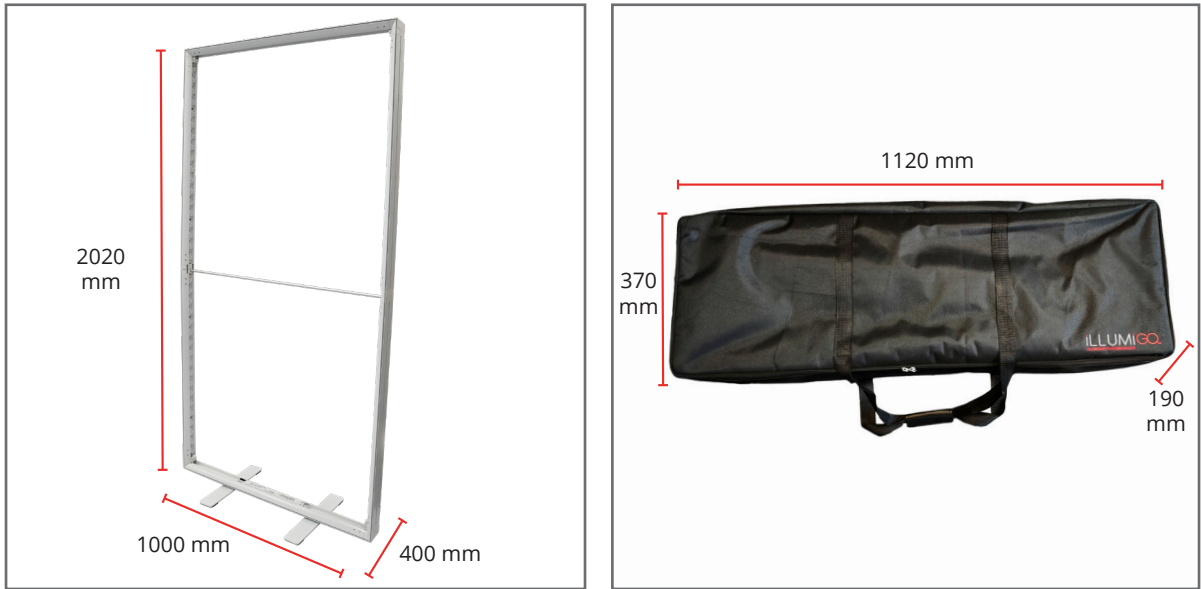


Lighting Info:

4 x 918mm LED strips / 72W (unit)
18 LED lens per strip
2680 Lumens - 6500 Kelvins

Input : 110/240V
Output : 24V 4.17A
Cable lenght : 3,08 m

Linkable frames: more info page 3

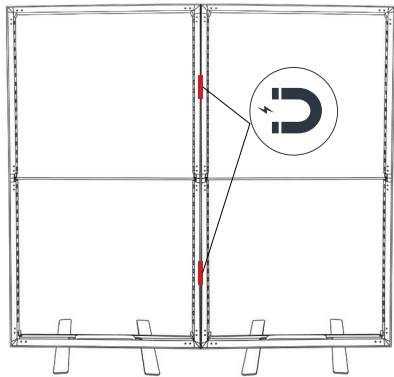

Hardware Information


Code	Description	Hardware assembled dimensions (mm) w x h x d	Hardware assembled weight*	Package dimensions (mm) h x w x d	Package weight
ILLGO-UP	Illumigo Up™	1000 x 2020 x 400	8,6 kg	180 x 1110 x 360	13 kg

*Without graphic

Connectors information (not included with the structure, please order separately)

Side-by-side frames



Connectors not required
=> magnets integrated into the profiles

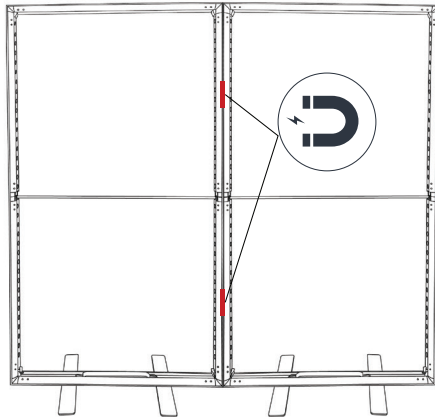

90° configurations



90° top corner connector:
ILLGO-90TC

Provide 1 connector to link 2
frames together

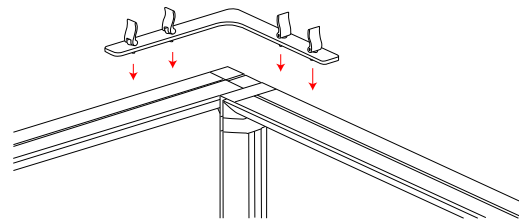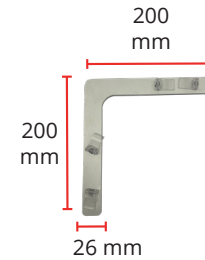

90° middle inside corner connectors:
ILLGO-90MIC



4 connectors are included to link 2
frames together

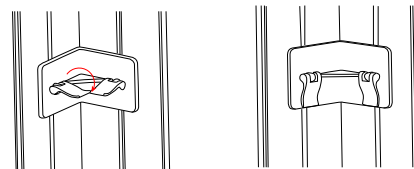


T-shape configurations

T-shape connector:
ILLGO-TC

Provide 1 connector to link
2 or 3 frames together

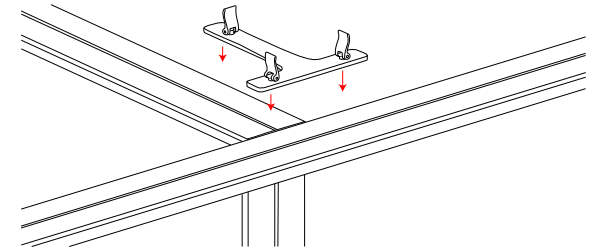

Literature holder information (not included with the frame, please order separately)

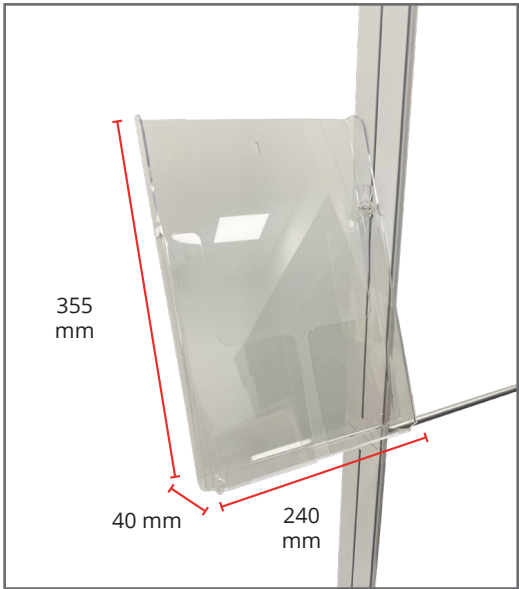


- Acrylic literature holder
- A4 format
- Maximum weight supported: 1,1 kg
- Compatible with Illumigo Up™ and Illumigo Lite™
- 2 literature holders max per frame
- Quick to install: is fixed in the channel profile




Code	Description	Assembled dimensions (mm) w x h x d	Net weight
ILLGO-LH-A4	A4 literature holder (Illumigo Up™/Illumigo Lite™)	240 x 355 x 40	0,41 kg

Assembly of the hardware and graphic


1

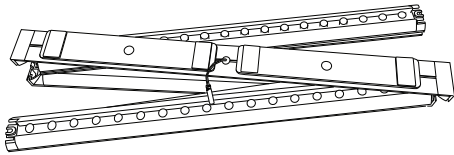


2

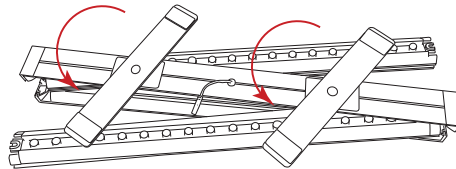


3

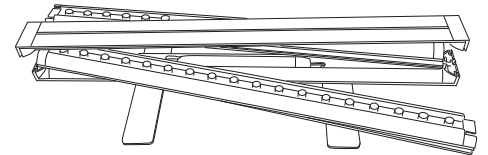


4

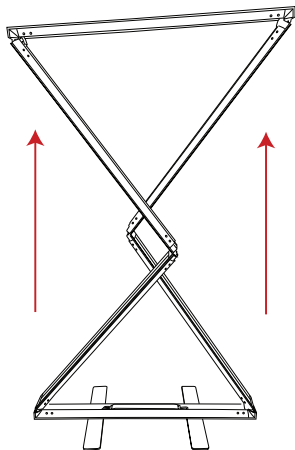

5

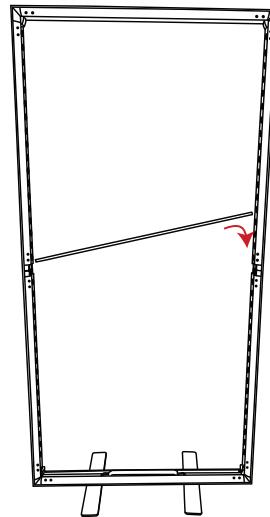


6

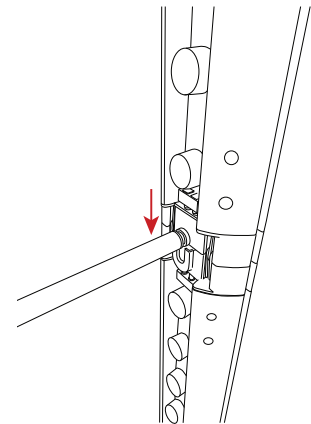


Assembly of the hardware and graphic


7

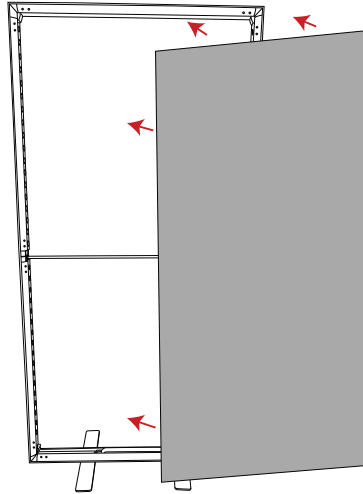

8

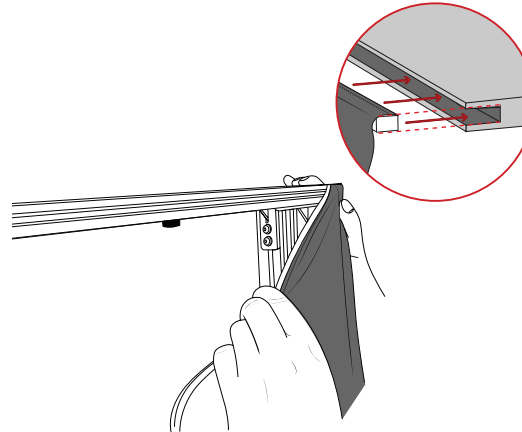

9

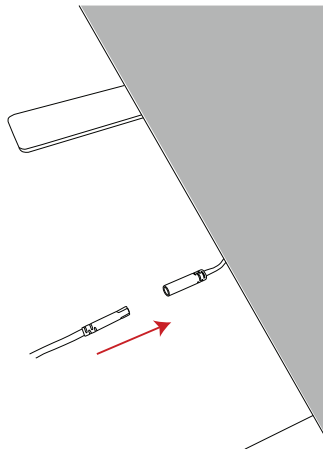

10

